


This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS					
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED
A		-1 FLIPPED HANDLE VERTICAL. -9 UPDATED PART INFO, ADDED P/N -21 ADDED P/N.	1/4/2013	BIM	SE
B		CORRECTED ORIENTATION OF -1 TO FIT FOAM.	3/5/2014	JAG	GE
2	15-0299	-8 ADDED TO BOM, -19 MCMASTER-CARR #8063K38 NO LONGER AVAILABLE USE #8063K37.	9/14/2015	RJC	JAG
3	16-0100	UPDATED TO NEW STANDARD -7 CH'D B/O PART NUMBER WAS 2 1/2 PFG807CD IS 2-1/2 PFG807.	8/9/2016	DEW	SM

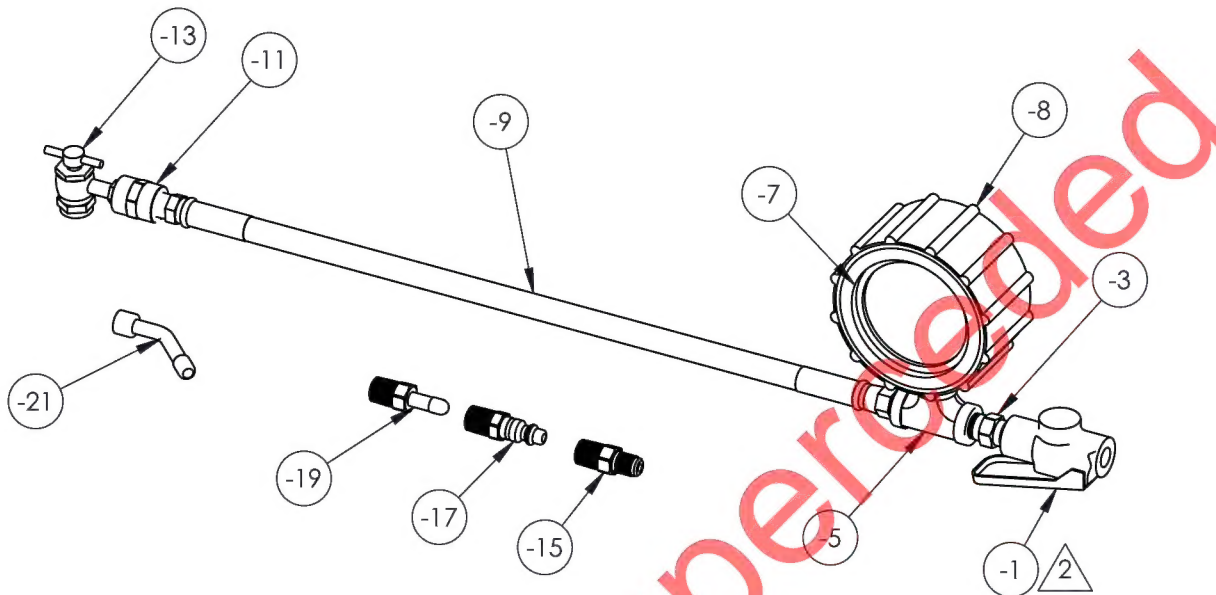

**NOTE:**

1. USED IN KIT RBW1205G00131-3G.

2. ORIENT -1 AS SHOW.

ASSY QTY	ASSY QTY	B/O	Part #	UNIT QTY	Description	Material	B/O INFORMATION OR SPECIFICATIONS	PG.
		B/O	-1	1	VALVE	ZINC ALLOY	(MCMASTER-CARR #6852K11)	1
		B/O	-3	1	HEX NIPPLE	ZINC-PLATED STEEL	1/4 NPT TO 1/4 NPT (MCMASTER-CARR #5232T316)	1
		B/O	-5	1	STANDARD TEE	ZINC-PLATED STEEL	1/4 NPT (MCMASTER-CARR #5232T243)	1
		B/O	-7	1	GAUGE		PARAMOUNT SUPPLY #2-1/2 PFG807	1
		B/O	-8	1	BOOT	RUBBER	PARAMOUNT SUPPLY #25	1
		B/O	-9	1	HOSE		PACIFIC RUBBER P/N 4M3K@ 18" OAL W/ MP& MPX (CRIMPED)	1
		B/O	-11	1	COUPLING	ZINC-PLATED STEEL	1/4 NPT TO 1/8 NPT (MCMASTER-CARR #5232T313)	1
		B/O	-13	1	BLEEDER	PLATED STEEL	PACIFIC RUBBER #AMF556	1
		B/O	-15	1	FITTING	ZINC-PLATED STEEL	1/4 NPT X 7/16-20 JIC (MCMASTER-CARR #50695K162)	1
		B/O	-17	1	FITTING	ZINC-PLATED STEEL	1/4 NPT X 1/4 PLUG (MCMASTER-CARR #6050T14)	1
		B/O	-19	1	VALVE	BRASS	1/4 NPT MALE X SCHRADER AIR VALVE (MCMASTER-CARR #8063K37)	1
		B/O	-21	1	VALVE		P/N 22596 SCHRADER 8028	1
		B/O	-23	1	VIAL	POLYPROPYLENE	(MCMASTER-CARR #5274T73)	NS

**DART AEROSPACE**

**TIRE INFLATOR GAUGE, NITROGEN**

DWG NO. **RBWST13045**

REV **3**

<p><b>MAT'L</b></p> <p><b>REAT</b></p> <p><b>TREAT</b></p> <p><b>FINISH</b></p> <p><b>SPEC</b></p>	<p>UNLESS OTHERWISE SPECIFIED</p> <p>DIMENSIONS ARE IN INCHES</p> <p>.XXX ± .005 FRACTIONS ± 1/8</p> <p>.XX ± .01 ANGLES ± .5°</p> <p>.X ± .1 SURFACES = 125°</p> <p>1. BREAK ALL SHARP EDGES .015 x 45° OR .015R</p> <p>2. DIMENSIONAL LIMITS APPLY AFTER PLATING</p> <p>3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009</p>
--	---

<p><b>DRAWN BY:</b> GILBERT</p> <p><b>CHECKED:</b> DUERFELDT</p> <p><b>OPPS APPR:</b> ANDERSON</p> <p><b>QA APPR:</b> LINDSAY</p> <p><b>APPROVED:</b> MACKOVJAK</p>	<p><b>USED ON MODEL</b></p> <p><b>AW139</b></p>
---	---

**SCALE** 1:4

**DATE** 12/19/2011

**SHEET** 1 OF 1